


Winterisation and safety cover 

SKIN Cold

Safety at low cost



Opaque cover



Wooden swimming pools



Individual bungee cord fastening



Drainage holes



Hem finish



Strap reinforcements




Abrasion resistance



NF P 90-308 safety cover



Storage bag

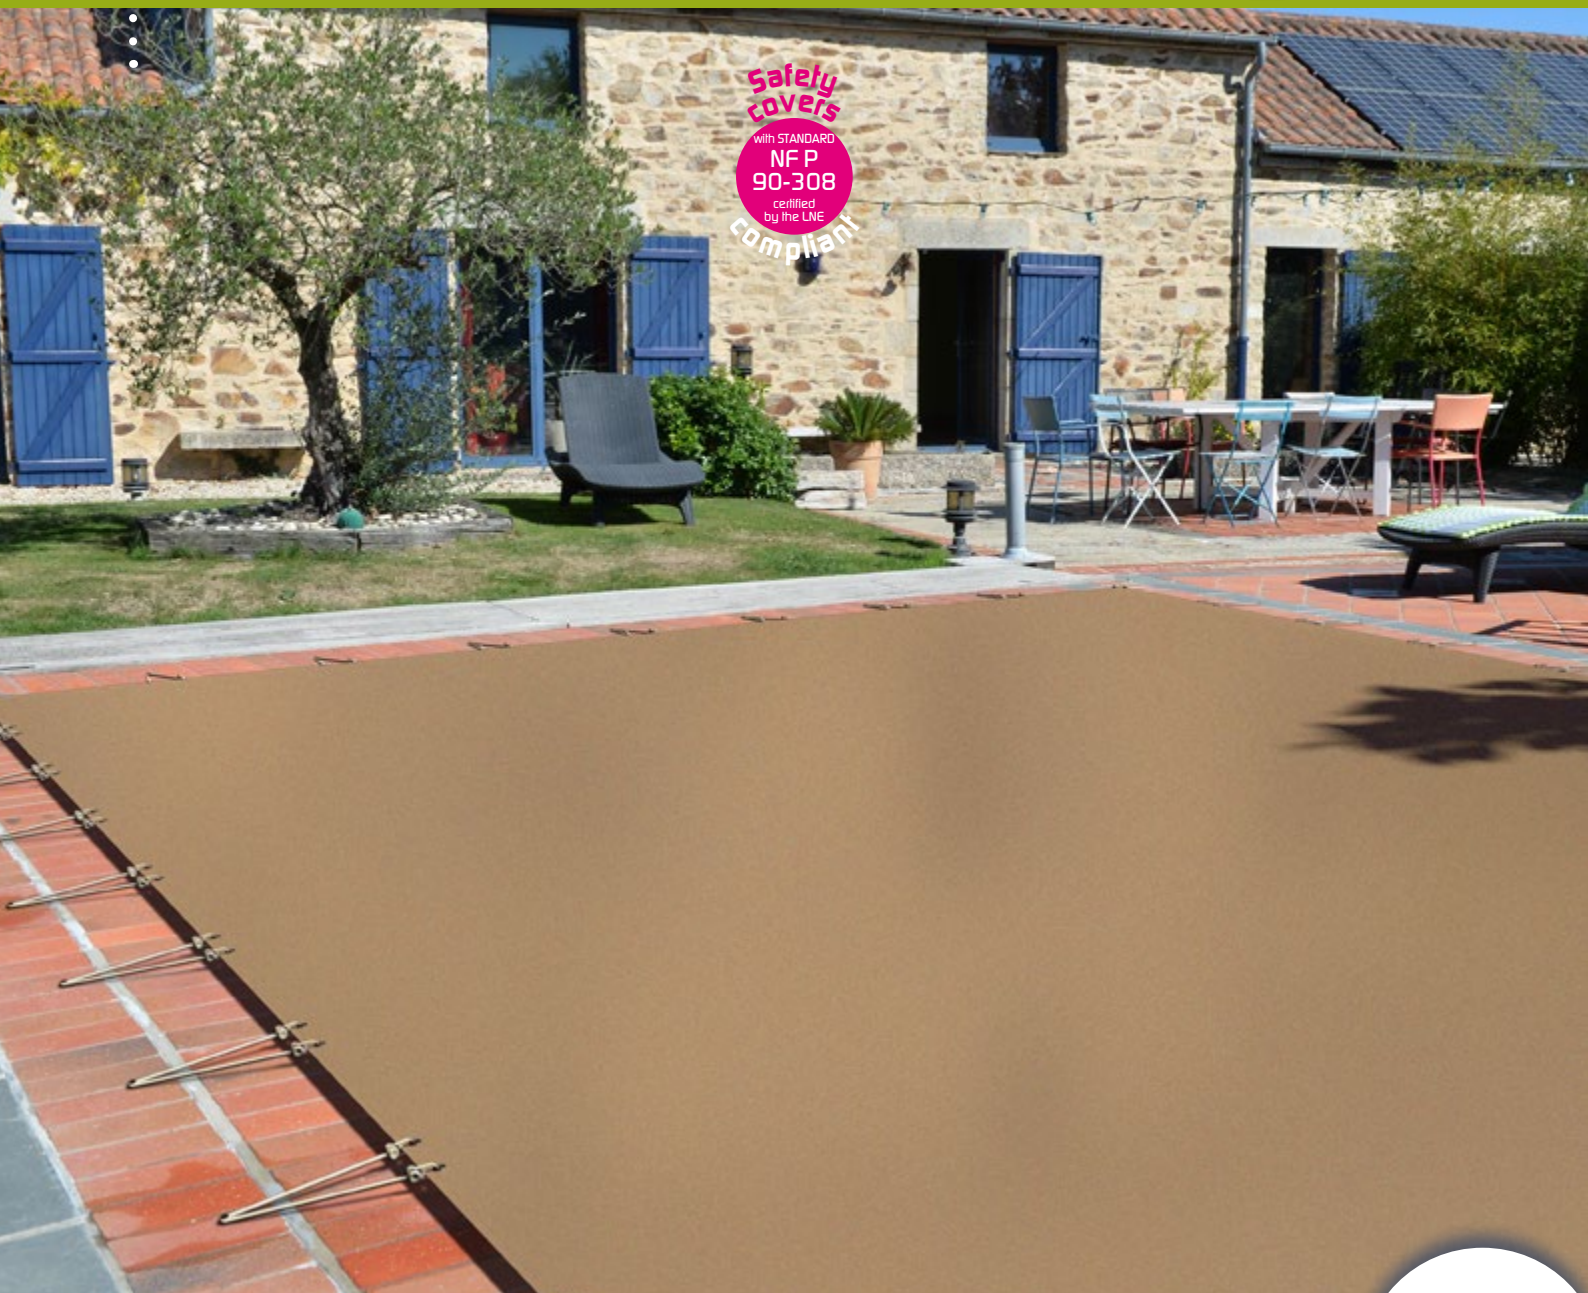


www.albiges.com

SKIN Cold

Excellent value for money.

Designed and manufactured in accordance with the NF P 90-308 standard, the Skin Cold safety and winterisation cover is suitable for almost all existing or new pools.

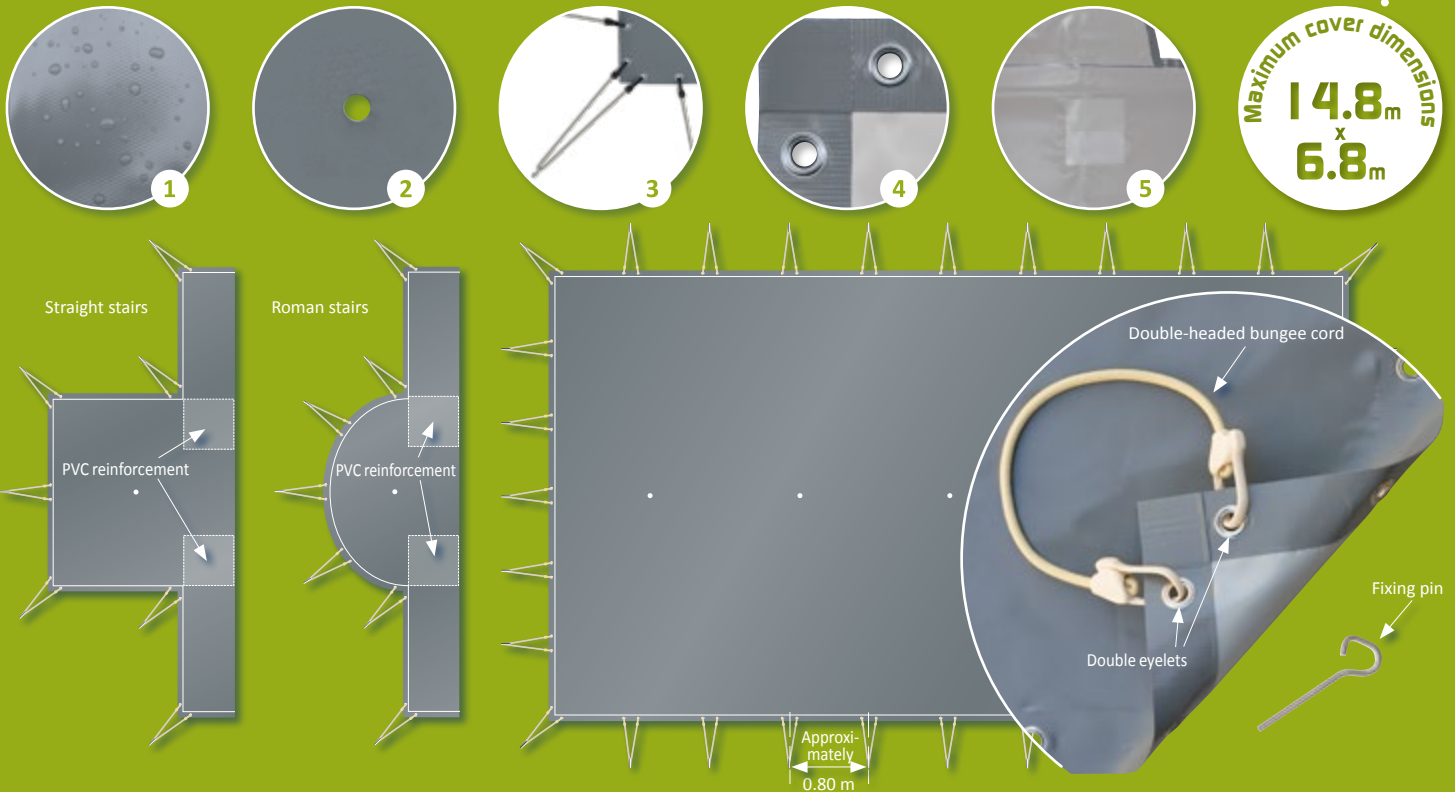

Quick and easy installation

1 Opacity

Maintains water transparency. Prevents photosynthesis. Reduces the use of treatment products. Makes it easier to put your pool back into service.

2 Drainage holes

allows fluid flow of rainwater. An effective overflow completes the system.

3 Perfect tension

Its double eyelet fastening system with individual bungee cords and fixing pins gives it impeccable tension once installed.

4 Quality finish and resistance

Full welded reinforcement hem for greater resistance against ripping of the eyelets.

5 Welded PVC corner reinforcements

prevent premature wear and tear of the cover on the coping at the inside corners of stairs.

*See our general conditions of sale. Maximum cover dimensions: 14.8 x 6.8 m (stairs included) for compliance with standard NF P 90-308.

Guarantee
3
Years*

COLOURS

Blue/Ivoire - Green/Ivoire - Amande/Ivoire - Ivoire/Ivoire - Terracotta/Ivoire - Camel/Ivoire - Grey/Grey - Dark grey/Grey

DELIVERED WITH

- PVC storage bag.
- Fixing pins.
- Double-headed bungee cords.

OPTIONS

- Aluminium bushing anchor $\varnothing 10$.
- Wooden pool deck anchor with screw.

IDENTITY CARD	
Fabric	Soft PVC reinforced with a polyester weft.
Weight	580 g/m ² .
Breaking strength	2,500 N/5 cm (warp) and 1,800 N/5 cm (weft).
Tear strength	250 N (warp and weft direction).
Treatment	UV, cryptogamic and bacterial.
Assembly	Welding.
Edge finish	5 cm full welded hem.
Overlap in relation to the water body	0.35 m or 0.40 m depending on the width of the coping. If it is ≥ 0.30 m, then 0.40 m overlap, if < then 0.35 m overlap.



Recommended retailer